


# MediaLink™ MLS Switching Systems

The System 5SA SM is a switcher based system with an integrated audio amplifier that provides more input capabilities than typically found on display devices. Passive WPB wall plates allow for A/V input connection to the System 5 IP Switcher from remote locations. The five input System 5 IP switches composite video, S-video, computer-video, and audio signals while delivering 40 watts of amplified stereo audio to the SI 26 surface mount speakers. Projector control, screen control and Ethernet based asset management/remote monitoring can be accomplished directly from the System 5 IP. An optional SCP 226 AAP with an IRCM-DV+ Control Module can further enhance operation by centralizing system control while providing DVD and VCR device control. Asset management and remote monitoring can be implemented through the Ethernet port on the System 5 IP Switcher.

## System 5SA SM

Qty	Model	Description	Part #	MSRP	Cost
1	System 5 IP FPC SA	Five Input A/V Switcher with Front Panel Control and Amplifier	60-397-81	\$ 3,510	\$
1	SI 26	Two-Way Surface Mount Speakers with 6.5" Woofer, Black - Sold in Pairs	42-072-02	\$ 390	\$
1	WPB 108	Wall Plate with Composite Video and Stereo Audio Connectors, Black	60-789-11	\$ 40	\$
1	WPBC 108-35'	Pre-terminated Composite Video and Stereo Audio Cable Assembly, 35' - Plenum	26-629-35	\$ 148	\$
1	MLSC 406/506/5IP-35'	Pre-terminated MLS 406/506/5IP Output Cable Assemblies, 35' - Plenum	42-097-35	\$ 270	\$
1	SPK 18 cable-100'	Pre-cut, unterminated 18 AWG Speaker Cable, 100' - Plenum	26-627-100	\$ 78	\$
1	MLC IR/RS-232-35'	Pre-terminated Projector Communications Cable, 35' - Plenum	26-621-35	\$ 66	\$
1	CSM 6 Adapter	3.5 mm Stereo Audio Female to 3.5 mm Captive Screw Adapter, 6" - Not Shown in Diagram	26-620-01	\$ 22	\$
1	CSR 6 Adapter	One 3.5 mm Captive Screw to Two RCA Female Adapter, 6" - Not Shown in Diagram	26-575-01	\$ 22	\$
1	MR 100	One-Gang Mud Ring, Black - Not Shown in Diagram, see page 97 for installation example	70-519-12	\$ 12	\$
	GlobalViewer™ 2.2	Web-based Asset Management & Remote Control Application	n/a	free	\$
	Global Configurator 2.2	Configuration Software for Extron IP Link Products	79-511-01	free	\$
	Warranty	3 years parts and labor - Speakers: 5 years parts and labor	n/a	free	\$
		MediaLink System 5SA SM	Subtotal	\$ 4,558	\$
<b>Optional Add-Ons - additional cabling may be required</b>					
1	SCP 226 AAP	Secondary Control Panel for System 5 IP with opening for AAPs, Black	60-671-12	\$ 440	\$
1	IRCM-DV+	Dual function DVD and VCR IR Control Module; Four Space AAP, Black	70-220-02	\$ 390	\$
1	MLC PW/RS-232/VC-35'	MLC Power, Communications, and Volume Control Cable, 35' - Plenum	26-626-35	\$ 38	\$
1	PCM 240	Projector Drop Ceiling Mount	60-772-03	\$ 150	\$
1	PMP Series	Projector Mount Pole, Black - Avail in 2", 4", 6", 10", 12", 18" & 24" lengths	70-511-XX	\$	\$
1	UPB 25	Universal Projector Mounting Bracket, Black	60-773-02	\$ 250	\$
1	VGA-A M-M MD/6	6' Male to Male VGA Molded Connectors with Audio Cable	26-490-02	\$ 38	\$
1	AV RCA/6	6' RCA Male to Male Composite Video and Stereo Audio Cable	IN8906	\$ 20	\$
1	MHR-2 SVM-M/6	6' Male to Male 4-pin Mini DIN 5-Video Cable	26-316-02	\$ 12	\$
1	A RCA/6	RCA Male to Male Stereo Audio Cable	IN8706	\$ 10	\$
				\$	\$
		Projector		\$	\$
		Projector Screen		\$	\$
		Misc. Hardware & Material		\$	\$
		Installation		\$	\$
		Total		\$	\$

\* Design Note: Patch cables for A/V sources shown on the following page are listed in the optional add-ons section. This system functionality is based on the display having the following performance capabilities: Discrete video input switching for composite video, S-video and computer sources; RS-232 control capability.

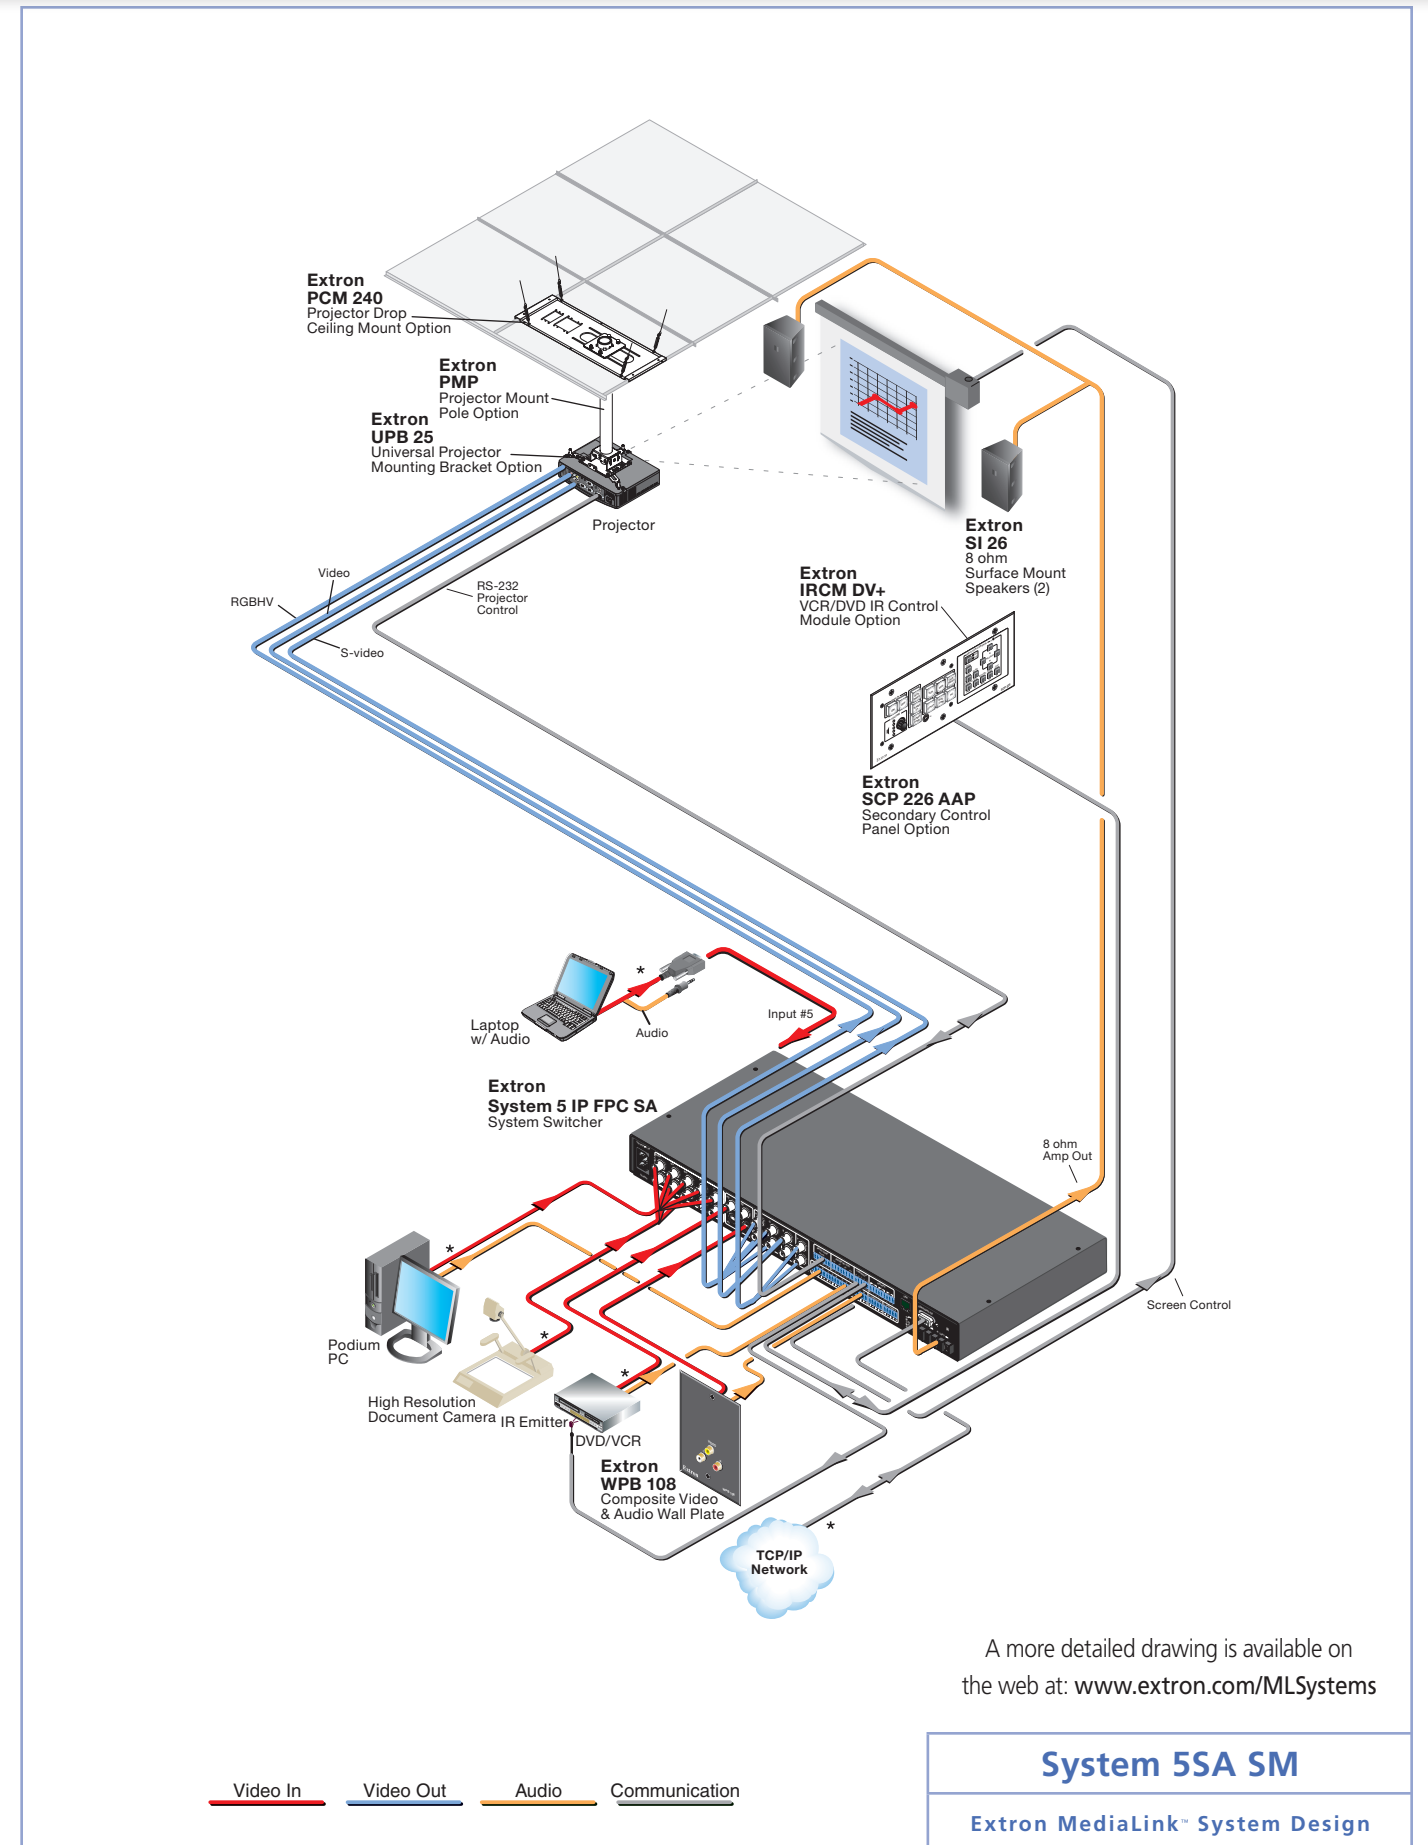

A more detailed drawing is available on the web at: [www.extron.com/MLSystems](http://www.extron.com/MLSystems)

### System 5SA SM

Extron MediaLink™ System Design